




HYDRA-TECH PUMPS

PORTABLE HYDRAULIC POWER UNIT

MODEL HT60DCV

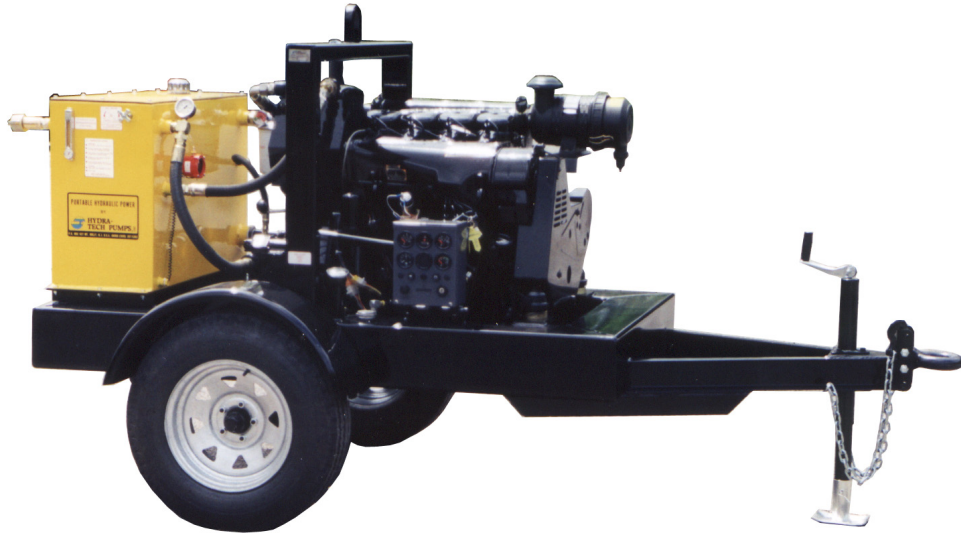

This popular unit features a Deutz air- cooled diesel engine and pressure compensated hydraulic pump for maximum versatility and enhanced performance when driving our submersible pumps.

FEATURES

- Highway Trailer Chassis with Built-In Fuel Tank and Independent Suspension
- Single Point Lifting Bracket and Tie Downs for Transport
- Automatic Engine Safety Shutdown
- Variable Piston Hydraulic Pump
- Efficient Hydraulic Oil Cooler
- Spin-On Return Filter w/Indicator
- Variable Speed Control
- Tank Top Filler/ Strainer
- System Relief Valve
- Pressure Control Valve
- Liquid Filled Pressure Gauge
- Fluid Level/ Temperature Gauge

OPTIONS

- D.O.T. Brakes and Lights
- Skid Frame
- Multiple Hydraulic Circuits
- Other Flow and Pressure Combinations


D0109



**HYDRA-TECH
PUMPS**

167 Stock Street, Nesquehoning, PA 18240 Phone: 570-645-3779 Fax: 570-645-4061
Website: www.hydra-tech.com E-Mail: htpump@hydra-tech.com

Model HT60DCV Overall Dimensions

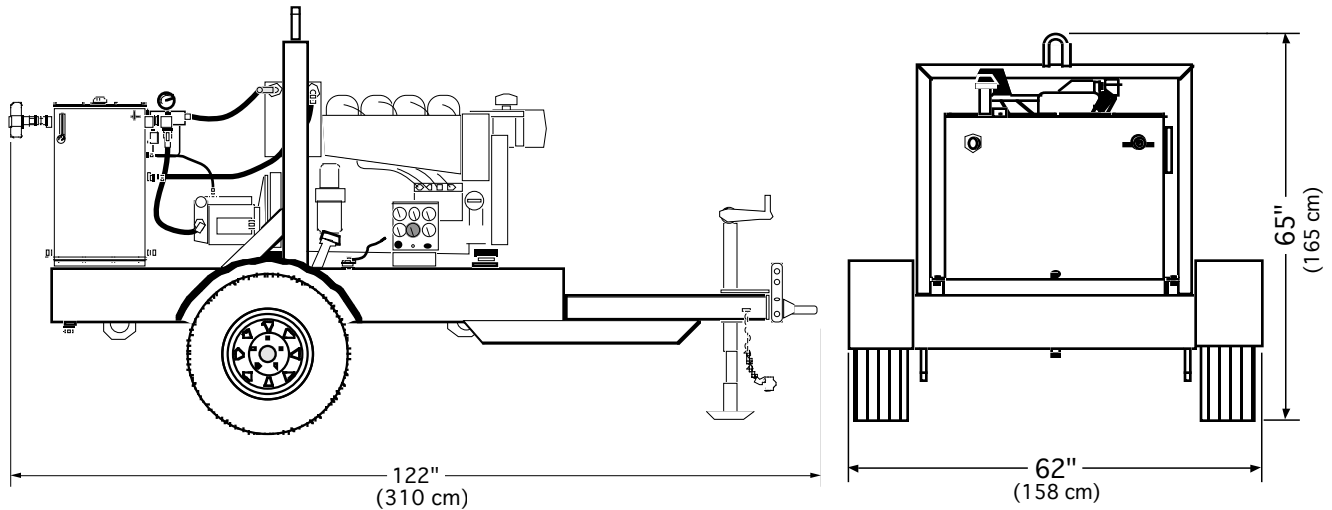

SPECIFICATIONS

ENGINE:..... Deutz D914L04 Air-Cooled Diesel (Tier 3)
HORSEPOWER:..... 70 @ 2300 RPM
HYDRAULIC OUTPUT*:..... Variable, Max. 26 GPM (98 LPM)
OPERATING PRESSURE*:..... Maximum 2900 PSI (197 Bar)
HOSE PORT SIZE:..... 1" NPT
HYDRAULIC OIL:..... SAE 10W or 20W Type AW
also: Biodegradable oil (Consult Factory)
OIL FILTRATION:..... 10 Micron (Standard)
OIL RESERVOIR CAPACITY:..... 50 U.S. Gallons (190 Liters)
FUEL TANK CAPACITY:..... 49 U.S. Gallons (186 Liters)
FUEL CONSUMPTION:..... Approx. 2.2 U.S. Gal/Hr (8.3 Liters/Hr)
DIMENSIONS:..... H 65" (165 cm) x W 62" (158 cm) x L 122" (310 cm)
WEIGHT (Dry):..... 2240 lbs. (1015 kg)

* For Flows and Pressures Other Than Standard, Consult Factory

Since we are constantly working to improve our products, specifications are subject to change without notice.



167 Stock Street, Nesquehoning, PA 18240 Phone: 570-645-3779 Fax: 570-645-4061
Website: www.hydra-tech.com E-Mail: htpump@hydra-tech.com